

FLEXCUT


New

ATOMIC

Power your graphics with the energy of FlexCut Atomic!

100% POLYURETHANE FILM,
HIGH DURABILITY AND THE TRUSTED
FLEXCUT EASY CUTTING & WEEDING.

7 NEW
SPARKLY COLORS
FOR YOUR BRILLANT
DESIGNS

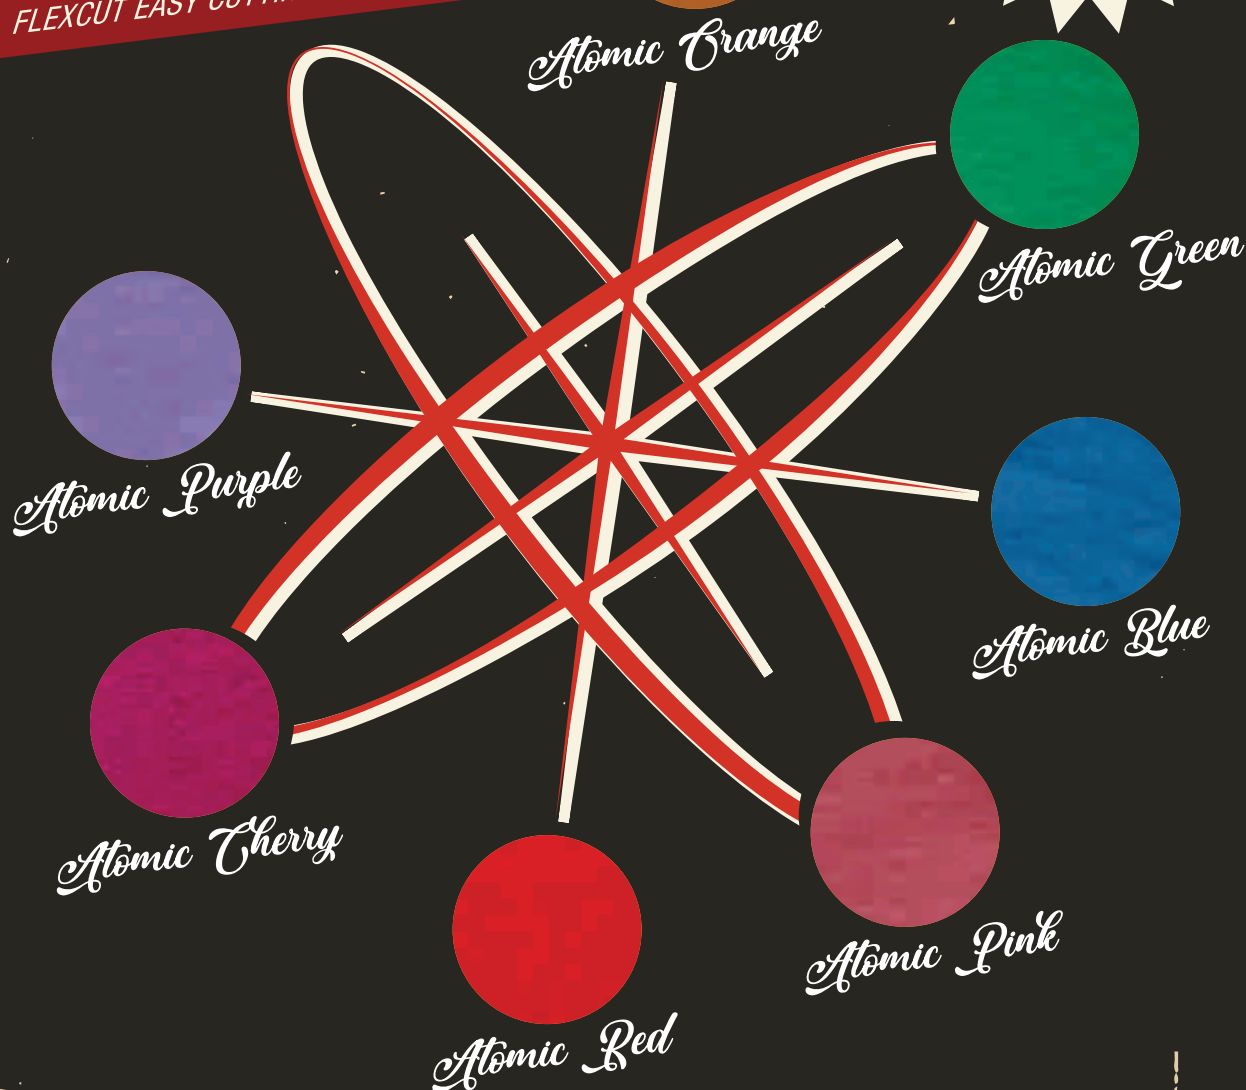


FLEXCUT *New* ATOMIC



1

Scan or create a digital vector image.




2

Cut a mirror-image of your design on a plotter-cutting machine.



3

Apply with an electric press.

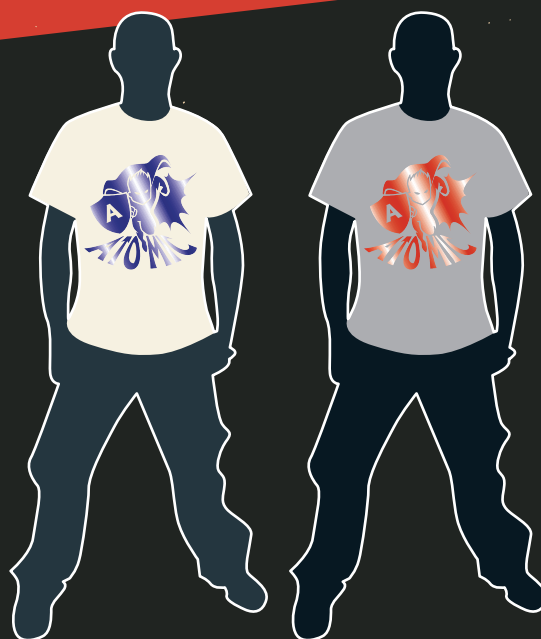

FlexCut Atomic

Transfer Temperature	Transfer Time	Transfer Pressure
150°C (300°F)	12 seconds	Medium/High pressure


Cotton, Polyester, PolyCotton...

Hot peel

Washing : up to 60°C (140°F)

Thickness : 60 µ

PACKAGING



50 cm (19,7")	5 meters (5,45 yd)
50 cm (19,7")	10 meters (10,9 yd)
50 cm (19,7")	25 meters (27,3 yd)



110 Bd Denis-Papin - 53000 LAVAL - France
Tél : 33 (0) 2 43 53 36 48
Fax : 33 (0) 2 43 67 11 78
Email : contact@sef-france.com
www.seftextile.com



SEF AMERICAS
14476 Duval Place West / Ste.201
Jacksonville, FL 32218 / 904-423-0211 - Phone / USA
sales@SEFamericas.com
www.sefamericas.com